


### Pin Topraklama Saati / Clock Face Earth Position

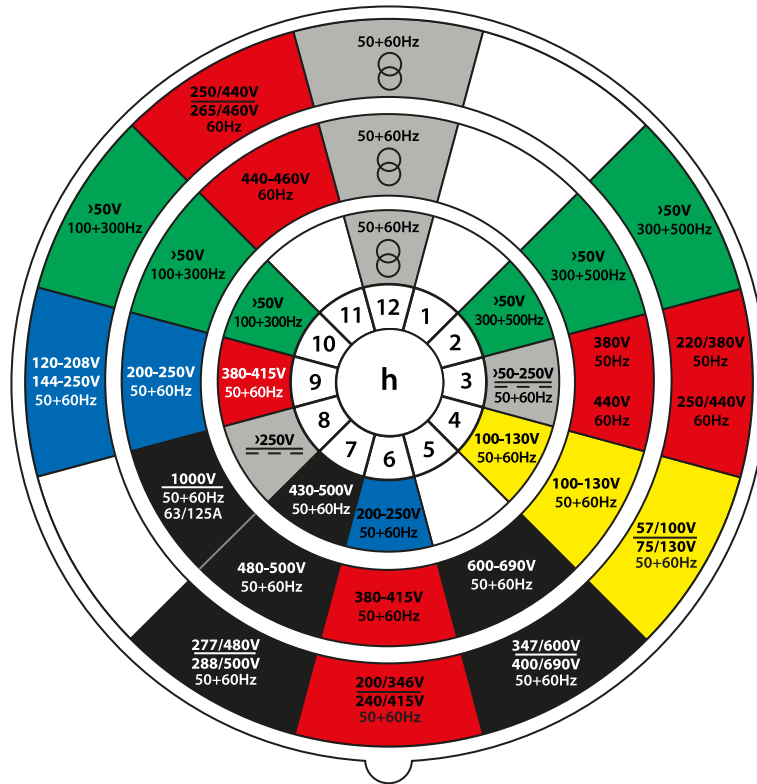

In order to recognize earth pin, you just have to look frontally at the socket and put the major keyway at 6 o'clock. In this way it is easy to identify the earth pin, Wich is always bigger that the others.

### Örnekler / Some examples:

### h3, Soğutmalı konteynerlerde / Refrigerated container

#### h4, Özel voltajlar / Especific voltages

## h6, Stantard kullanımı / Stantard use

## h7, Özel voltajlar / Especific voltages


# h11, Gemi tasisatında / Marine installation

- Yürürlükte olan ulusal ve uluslararası standartlara uygun olarak üretilen **TEM** CEE Norm Fiş & Prizler, kaliteli bileşenleri ile güvenliği garanti eder.

All **TEM** CEE Norm Plug & Sockets are manufactured in compliance with the national and international regulations in force with good quality component parts guarantee the safety.

- IP 44 ve IP 67 gibi yüksek koruma dereceleri, değişik nominal akım değerleri (16A, 32A, 63A) ve uygulama alanına göre çeşitli şekilleri ( duvar tipi, pano tipi, eğik, düz, kasalı...) mevcuttur.

Different execution styles (wall mounting, panel mounting, angled, straight, with box) are available like high protection degrees (IP 44 AND IP 67) and different nominal currents (16A, 32A, 63A ).

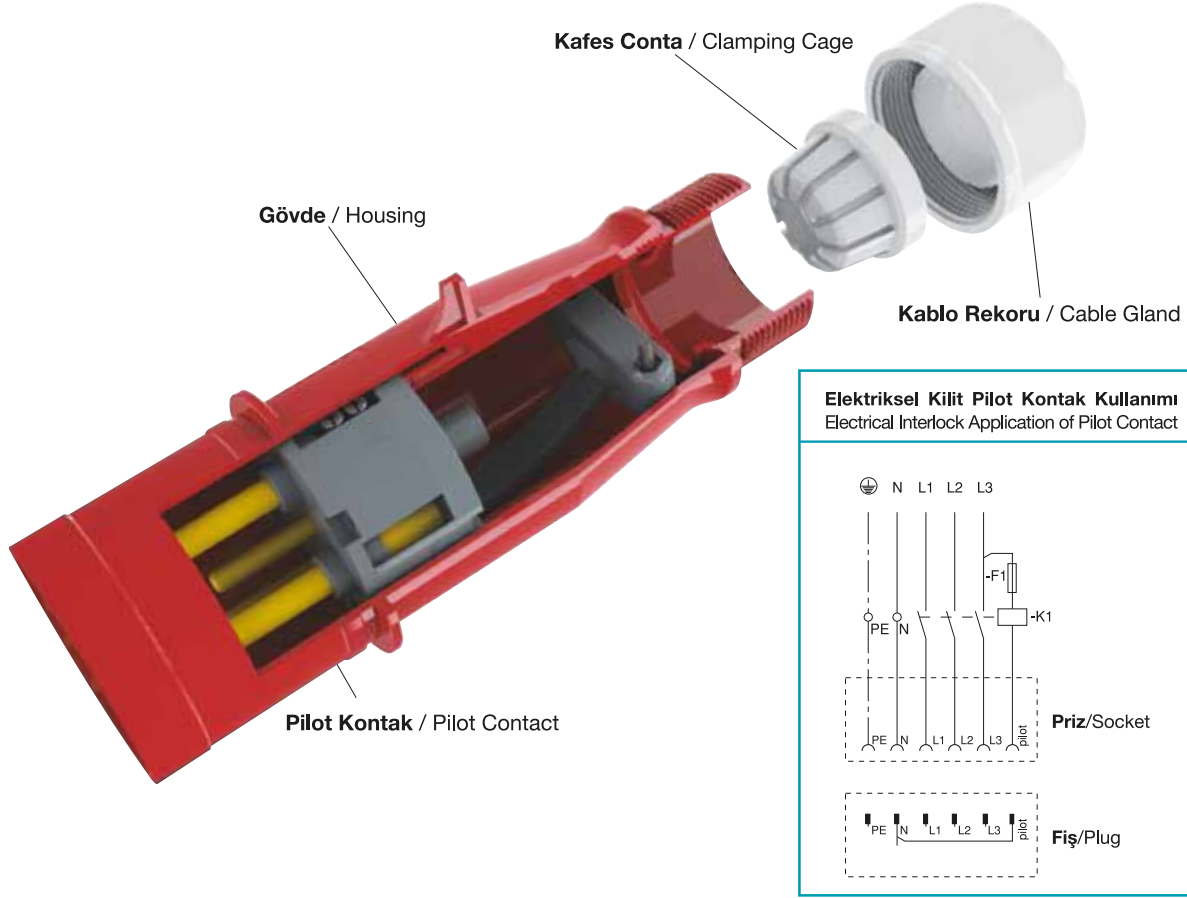

| Standards                    | Nominal Voltage Un (V) | Poles | Color | Nominal Current In (A) | h | IP    | Hz.   | Installation Temperature |       |
|------------------------------|------------------------|-------|-------|------------------------|---|-------|-------|--------------------------|-------|
| EN 60309-1-2<br>TS 7205-7206 | 110                    | 3     |       | 16                     | 4 | 44    | 50-60 | -25°C                    | +60°C |
|                              | 220                    | 3     |       | 16                     | 6 | 44    |       |                          |       |
|                              | 380                    | 4     |       | 16                     |   | 44-67 |       |                          |       |
|                              | 380                    | 5     |       | 32                     |   | 44-67 |       |                          |       |
|                              | 220                    | 3     |       | 32                     |   | 44-67 |       |                          |       |
|                              | 380                    | 4     |       | 32                     |   | 44-67 |       |                          |       |
|                              | 380                    | 5     |       | 63                     |   | 44-67 |       |                          |       |
|                              | 380                    | 4     |       | 63                     |   | 44-67 |       |                          |       |

| Nominal Current in (A) | Terminal        | Terminal Cable Capacity mm <sup>2</sup> NYA |      |
|------------------------|-----------------|---------------------------------------------|------|
| A                      | mm <sup>2</sup> | min.                                        | max. |
| 16                     | 20              | 1,5                                         | 4    |
| 32                     | 50              | 2,5                                         | 10   |
| 63                     | 113             | 6                                           | 25   |

| Material | Installation Temperature | Heat Resistance Level |
|----------|--------------------------|-----------------------|
| PA       | -25°C<br>+60°C           | V2                    |

# CEE NORM Fiş & Prizler / CEE Plugs & Sockets

| 16A | 4h | 3Poles | 2P+E | IP44 | 110-130 V~ |
|-----|----|--------|------|------|------------|
|-----|----|--------|------|------|------------|

\* Teknik resimler için bakınız:  
Sayfa 136-137

\* Check technical drawings on:  
Page 136-137

**Pano Prizi**  
/ Panel mounting socket  
444.316.150



IP 44



**Dik Kasalı Duvar Prizi**  
/ Wall mounting socket with straight box  
444.316.151



IP 44




**Eğik Kasalı Duvar Prizi**  
/ Wall mounting socket with angled box  
444.316.152



IP 44




**Kapaklı Seyyar Priz**  
/ Connector with cover  
444.316.200

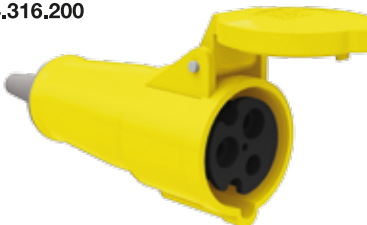

IP 44



**Seyyar Fiş**  
/ Connector  
444.316.300

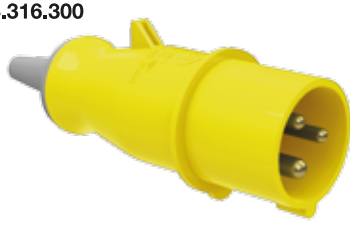

IP 44



| 16A | 6h | 3Poles | 2P+E | IP44 | 200-250 V~ |
|-----|----|--------|------|------|------------|
|-----|----|--------|------|------|------------|

**Pano Prizi**  
/ Panel mounting socket  
446.316.150



IP 44



**Dik Kasalı Duvar Prizi**  
/ Wall mounting socket with straight box  
446.316.151



IP 44



**Eğik Kasalı Duvar Prizi**  
/ Wall mounting socket with angled box  
446.316.152



IP 44



**Eğik Kasalı Duvar Prizi + Schuko**  
/ Wall mounting socket with angled box+Schuko  
446.316.153



IP 44



**Kapaklı Seyyar Priz**  
/ Connector with cover  
446.316.200



IP 44



**Seyyar Fiş**  
/ Plug  
446.316.300



IP 44



32A

6h

3Poles

2P+E

200-250 V~

**Pano Prizi**  
/ Panel mounting socket  
446.332.150



IP 44



235 gr.



12

**Dik Kasalı Duvar Prizi**  
/ Wall mounting socket with straight box  
446.332.151



IP 44



347 gr.



6

**Eğik Duvar Prizi**  
/ Angled wall mounting socket  
446.332.400



IP 44



299 gr.



12

**Kapaklı Seyyar Priz**  
/ Connector with cover  
446.332.200



IP 44



244 gr.



12

**Seyyar Fiş**  
/ Connector  
446.332.300



IP 44



208 gr.



12

**Kilitli Kapaklı Pano Prizi**  
/ Panel mounting socket with locked cover  
676.332.150



IP 67



246 gr.



12

**Dik Kasalı Duvar Prizi**  
/ Wall mounting socket with straight box  
676.332.151



IP 67



378 gr.



6

**Kilitli Fiş**  
/ Plug with lock  
676.332.300



IP 44



237 gr.



12

16A

6h

4Poles

3P+E

380-415 V~

**Pano Prizi**  
/ Panel mounting socket  
446.416.150



IP 44



163 gr.

**Pano Prizi**  
/ Panel mounting socket  
446.416.160



IP 44



180 gr.

**Dik Kasalı Duvar Prizi**  
/ Wall mounting socket with straight box  
446.416.151



IP 44



226 gr.

**Eğik Duvar Prizi**  
/ Angled wall mounting socket  
446.416.152



IP 44



285 gr.

**Eğik Kasalı Duvar Prizi + Schuko**  
/ Wall mounting socket with angled box+Schuko  
446.416.153



IP 44



323 gr.

**Kapaklı Seyyar Priz**  
/ Connector with cover  
446.416.200



IP 44



181 gr.

**Seyyar Priz**  
/ Connector  
446.416.300



IP 44



141 gr.

**Kilitli Kapaklı Pano Prizi**  
/ Panel mounting socket with locked cover  
676.416.160



IP67



210 gr.

**Kilitli Kapaklı Dik Kasalı Duvar Prizi**  
/ Wall mounting socket with straight box + locked cover  
676.416.161



IP 67



324 gr.

**Kilitli Kapaklı Seyyar Priz**  
/ Connector with locked cover  
676.416.200



IP 44



195 gr.

**Kilitli Seyyar Fiş**  
/ Plug with lock  
676.416.300



IP 44






161 gr.



| 32A                                                                                                     | 6h                                                                                  | 4Poles                                                                                                                    | 3P+E                                                                                | 380-415 V~                                                                                                |                                                                                       |
|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Pano Prizi</b><br>/ Panel mounting socket<br>446.432.150                                             |    | <b>Dik Kasalı Duvar Prizi</b><br>/ Wall mounting socket with straight box<br>446.432.151                                  |    | <b>Eğik Duvar Prizi</b><br>/ Angled wall mounting socket<br>446.432.400                                   |    |
| IP 44<br>242 gr.<br>   |                                                                                     | IP 44<br>357 gr.<br>                    |                                                                                     | IP 44<br>307 gr.<br>   |                                                                                       |
| <b>Kapaklı Seyyar Priz</b><br>/ Connector<br>446.432.200                                                |   | <b>Seyyar Fiş</b><br>/ Plug<br>446.432.300                                                                                |   | <b>Makine Fiş</b><br>/ Panel mounting inlet<br>446.432.330                                                |   |
| IP 44<br>256 gr.<br> |                                                                                     | IP 44<br>227 gr.<br>                  |                                                                                     | IP 44<br>149 gr.<br> |                                                                                       |
| <b>Dik Kasalı Makine Fiş</b><br>/ Wall mounting inlet with straight box<br>446.432.331                  |  | <b>Eğik Kasalı Makine Fiş</b><br>/ Wall mounting inlet with angled box<br>446.432.332                                     |  | <b>Eğik Kasalı Makine Fiş + Schuko</b><br>/ Wall mounting inlet with angled box+Schuko<br>446.432.333     |  |
| IP 44<br>212 gr.<br> |                                                                                     | IP 44<br>270 gr.<br>                  |                                                                                     | IP44<br>309 gr.<br>  |                                                                                       |
| <b>Kilitli Kapaklı Pano Prizi</b><br>/ Panel mounting socket with locked cover<br>676.432.150           |  | <b>Kilitli Kapaklı Dik Kasalı Duvar Prizi</b><br>/ Wall mounting socket with straight box and locked cover<br>676.432.151 |  | <b>Kilitli Seyyar Fiş</b><br>/ Plug with lock<br>676.432.300                                              |  |
| IP 67<br>267 gr.<br> |                                                                                     | IP 67<br>381 gr.<br>                  |                                                                                     | IP 44<br>256 gr.<br> |                                                                                       |

| 63A                                                                                                                                                                                           | 6h                                                                                                                                                                                             | 4Poles                                                                                                                                                                                            | 3P+E(+Plt)                                                                          | 380-415 V~                                                   |                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Pano Prizi</b><br>/ Panel mounting socket<br>446.463.150                                                                                                                                   |                                                                                                               | <b>Kapaklı Seyyar Priz</b><br>/ Connector<br>446.463.200                                                                                                                                          |   | <b>Seyyar Fiş</b><br>/ Plug<br>446.463.300                   |   |
| IP 44<br> 569 gr.<br> 6     | IP 44<br> 625 gr.<br> 6     | IP 44<br> 495 gr.<br> 6     |                                                                                     |                                                              |                                                                                      |
| <b>Kilitli Kapaklı Pano Prizi</b><br>/ Panel mounting socket with locked cover<br>676.463.150                                                                                                 |                                                                                                              | <b>Kilitli Kapaklı Seyyar Priz</b><br>/ Connector with locked cover<br>676.463.200                                                                                                                |  | <b>Kilitli Seyyar Fiş</b><br>/ Plug with lock<br>676.463.300 |  |
| IP 67<br> 586 gr.<br> 6 | IP 67<br> 665 gr.<br> 6 | IP 67<br> 530 gr.<br> 6 |                                                                                     |                                                              |                                                                                      |
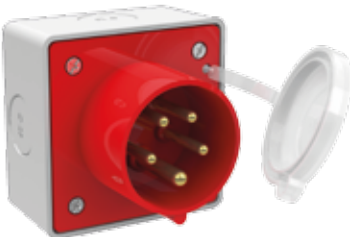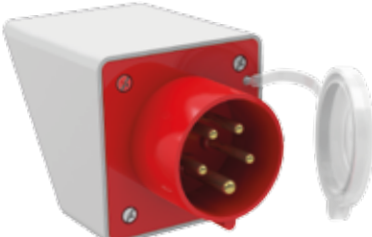
| 16A                                                                                                     | 6h                                                                                                                                                                                                                                                                                                                                                                    | 5Poles                                                                                   | 3P+N+E                                                                                                                                                                                                                                                                                                                                                                | IP44                                                                                                  | 380-415 V~                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Pano Prizi</b><br>/ Panel mounting socket<br>446.516.150                                             |  <div>                     IP 44                      155 gr.                      12                 </div>       | <b>Dik Kasalı Duvar Prizi</b><br>/ Wall mounting socket with straight box<br>446.516.151 |  <div>                     IP 44                      218 gr.                      12                 </div>       | <b>Eğik Kasalı Duvar Prizi</b><br>/ Wall mounting socket with angled box<br>446.516.152               |  <div>                     IP 44                      276 gr.                      12                 </div>       |
| <b>Eğik Kasalı Duvar Prizi + Schuko</b><br>/ Wall mounting socket with angled box+Schuko<br>446.516.153 |  <div>                     IP 44                      314 gr.                      12                 </div>  | <b>Eğik Duvar Priz</b><br>/ Angled wall mounting socket<br>446.516.400                   |  <div>                     IP 44                      214 gr.                      12                 </div>  | <b>Seyyar Priz</b><br>/ Connector<br>446.516.200                                                      |  <div>                     IP 44                      192 gr.                      12                 </div>  |
| <b>Seyyar Fiş</b><br>/ Plug<br>446.516.300                                                              |  <div>                     IP 44                      155 gr.                      12                 </div> | <b>Eğik Fiş</b><br>/ Angled plug<br>446.516.320                                          |  <div>                     IP 44                      185 gr.                      12                 </div> | <b>Makine Fiş</b><br>/ Panel mounting inlet<br>446.516.330                                            |  <div>                     IP44                      115 gr.                      12                 </div>  |
| <b>Dik Kasalı Makine Fiş</b><br>/ Wall mounting inlet with straight box<br>446.516.331                  |  <div>                     IP 44                      178 gr.                      12                 </div> | <b>Eğik Kasalı Makine Fiş</b><br>/ Wall mounting inlet with angled box<br>446.516.332    |  <div>                     IP 44                      237 gr.                      12                 </div> | <b>Eğik Kasalı Makine Fiş + Schuko</b><br>/ Wall mounting inlet with angled box+Schuko<br>446.516.333 |  <div>                     IP 44                      275 gr.                      12                 </div> |



16A

6h

5Poles

3P+N+E

IP67

380-415 V~

## Kilitli Kapaklı Pano Prizi

/ Panel mounting socket with locked cover  
676.516.150



IP 67



## Kilitli Kapaklı Dik Kasalı Duvar Prizi

/ Wall mounting socket with straight box and locked cover  
676.516.151



IP67



**Kilitli Kapaklı Eğik Kasalı Duvar Prizi**  
/ Wall mounting socket with angled box and locked cover  
676.516.152



IP67



**Kilitli Kapaklı Eğik Kasalı Duvar Prizi + Schuko**  
/ Wall mounting socket with angled box and locked cover+Schuko  
676.516.153



IP67






**Kilitli Seyyar Fiş**  
/ Plug with lock

676.516.300



IP44

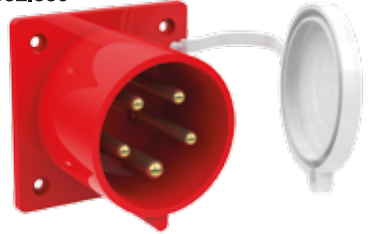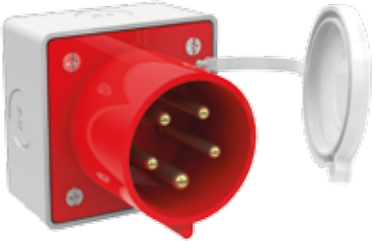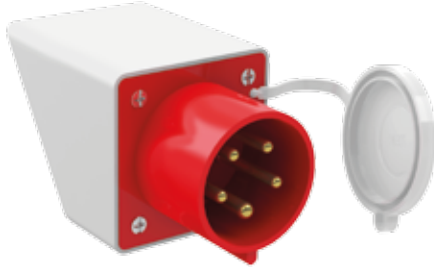

| 32A                                                                                                                                                                                                                | 6h                                                                                                                                                                                                                                            | 5Poles                                                                                                                                                                                                                      | 3P+N+E                                                                                                                                                                                                      | 380-415 V~ |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
|                                                                                                                                                                                                                    |                                                                                                                                                                                                                                               | <p><b>Pano Prizi</b><br/>/ Panel mounting socket<br/>446.532.150</p>  <p>IP 44 255 gr. 12</p>                                              | <p><b>Dik Kasalı Duvar Prizi</b><br/>/ Wall mounting socket with straight box<br/>446.532.151</p>  <p>IP44 369 gr. 6</p> |            |
| <p><b>Seyyar Priz</b><br/>/ Connector<br/>446.532.200</p>  <p>IP 44 300 gr. 12</p>                                                | <p><b>Seyyar Fiş</b><br/>/ Plug<br/>446.532.300</p>  <p>IP 44 250 gr. 12</p>                                                                                | <p><b>Makine Fiş</b><br/>/ Panel mounting inlet<br/>446.532.330</p>  <p>IP 44 174gr. 12</p>                                             |                                                                                                                                                                                                             |            |
| <p><b>Dik Kasalı Makine Fiş</b><br/>/ Wall mounting inlet with straight box<br/>446.532.331</p>  <p>IP 44 235 gr. 12</p>        | <p><b>Eğik Kasalı Makine Fiş</b><br/>/ Wall mounting inlet with angled box<br/>446.532.332</p>  <p>IP 44 295 gr. 12</p>                                   | <p><b>Eğik Kasalı Makine Fiş + Schuko</b><br/>/ Wall mounting inlet with angled box+Schuko<br/>446.532.333</p>  <p>IP44 334 gr. 12</p> |                                                                                                                                                                                                             |            |
| <p><b>Kilitli Kapaklı Pano Prizi</b><br/>/ Panel mounting socket with locked cover<br/>676.532.150</p>  <p>IP 67 259 gr. 12</p> | <p><b>Kilitli Kapaklı Dik Kasalı Duvar Prizi</b><br/>/ Wall mounting socket with straight box and locked cover<br/>676.532.151</p>  <p>IP 67 410 gr. 6</p> | <p><b>Kilitli Seyyar Fiş</b><br/>/ Plug with lock<br/>676.532.300</p>  <p>IP 44 280 gr. 12</p>                                         |                                                                                                                                                                                                             |            |

| 63A | 6h | 5Poles | 3P+N+E(+PE) | 380-415 V~ |
|-----|----|--------|-------------|------------|
|-----|----|--------|-------------|------------|

**Pano Prizi**  
/ Panel mounting socket  
446.563.150



**Kilitli Seyyar Priz**  
/ Connector with cover  
446.563.200



**Seyyar Fiş**  
/ Plug  
446.563.300



**Kilitli Kapaklı Pano Prizi**  
/ Panel mounting socket with locked cover  
676.563.150



**Kilitli Kapaklı Seyyar Priz**  
/ Connector with locked cover  
676.563.200



**Kilitli Seyyar Fiş**  
/ Plug with lock  
676.563.300



6h

## Seyyar 3'lü Çoklayıcı Prizler / 3Way Multiplier Sockets

50-60 Hz.

**Rekor Girişili 3'lü Prizler**  
/ Gland Entry 3 Way Sockets



| IP44 | Ref Code       | A  | P      | VOLT    |   |
|------|----------------|----|--------|---------|---|
|      | 1344.316.333.1 | 16 | 2P+T   | 200-250 | 2 |
|      | 1344.332.333.1 | 32 | 2P+T   | 200-250 | 4 |
|      | 1344.416.333.1 | 16 | 3P+T   | 380-415 | 2 |
|      | 1344.432.333.1 | 32 | 3P+T   | 380-415 | 2 |
|      | 1344.516.333.1 | 16 | 3P+N+T | 380-415 | 2 |
|      | 1344.532.333.1 | 32 | 3P+N+T | 380-415 | 2 |

**Fiş Girişili 3'lü Prizler**  
/ Plug Entry 3 Way Sockets



| IP44 | Ref Code       | A  | P      | VOLT    |   |
|------|----------------|----|--------|---------|---|
|      | 1344.316.333.0 | 16 | 2P+T   | 200-250 | 2 |
|      | 1344.332.333.0 | 32 | 2P+T   | 200-250 | 4 |
|      | 1344.416.333.0 | 16 | 3P+T   | 380-415 | 2 |
|      | 1344.432.333.0 | 32 | 3P+T   | 380-415 | 2 |
|      | 1344.516.333.0 | 16 | 3P+N+T | 380-415 | 2 |
|      | 1344.532.333.0 | 32 | 3P+N+T | 380-415 | 2 |

**Rekor Girişili 3'lü Prizler**  
/ Gland Entry 3 Way Sockets



| IP67 | Ref Code       | A  | P      | VOLT    |   |
|------|----------------|----|--------|---------|---|
|      | 1367.316.333.1 | 16 | 2P+T   | 200-250 | 2 |
|      | 1367.332.333.1 | 32 | 2P+T   | 200-250 | 4 |
|      | 1367.416.333.1 | 16 | 3P+T   | 380-415 | 2 |
|      | 1367.432.333.1 | 32 | 3P+T   | 380-415 | 2 |
|      | 1367.516.333.1 | 16 | 3P+N+T | 380-415 | 2 |
|      | 1367.532.333.1 | 32 | 3P+N+T | 380-415 | 2 |

**Fiş Girişili 3'lü Prizler**  
/ Plug Entry 3 Way Sockets



| IP67 | Ref Code       | A  | P      | VOLT    |   |
|------|----------------|----|--------|---------|---|
|      | 1367.316.333.0 | 16 | 2P+T   | 200-250 | 2 |
|      | 1367.332.333.0 | 32 | 2P+T   | 200-250 | 4 |
|      | 1367.416.333.0 | 16 | 3P+T   | 380-415 | 2 |
|      | 1367.432.333.0 | 32 | 3P+T   | 380-415 | 2 |
|      | 1367.516.333.0 | 16 | 3P+N+T | 380-415 | 2 |
|      | 1367.532.333.0 | 32 | 3P+N+T | 380-415 | 2 |

6h

## Pano Prizler / Panel Mounting Sockets

50-60 Hz.

### 75x75 Dik Pano Prizler

/ 75x75 Straight Panel Mounting Sockets



| IP44 | Ref Code    | A  | P      | VOLT    |    |
|------|-------------|----|--------|---------|----|
|      | 446.316.180 | 16 | 2P+T   | 200-250 | 10 |
|      | 446.332.180 | 32 | 2P+T   | 200-250 | 5  |
|      | 446.416.180 | 16 | 3P+T   | 380-415 | 10 |
|      | 446.432.180 | 32 | 3P+T   | 380-415 | 5  |
|      | 446.516.180 | 16 | 3P+N+T | 380-415 | 8  |
|      | 446.532.180 | 32 | 3P+N+T | 380-415 | 5  |

### Eğik Pano Prizler

/ Angled Mounting Sockets



| IP44 | Ref Code    | A  | P      | VOLT    |    |
|------|-------------|----|--------|---------|----|
|      | 446.316.190 | 16 | 2P+T   | 200-250 | 10 |
|      | 446.332.190 | 32 | 2P+T   | 200-250 | 5  |
|      | 446.416.190 | 16 | 3P+T   | 380-415 | 10 |
|      | 446.432.190 | 32 | 3P+T   | 380-415 | 5  |
|      | 446.516.190 | 16 | 3P+N+T | 380-415 | 8  |
|      | 446.532.190 | 32 | 3P+N+T | 380-415 | 5  |

### Kilitli Kapaklı Dik Pano Prizler

/ Straight Panel Mounting Sockets with Locked Cover



| IP67 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 676.316.180 | 16 | 2P+T   | 200-250 | 8 |
|      | 676.332.180 | 32 | 2P+T   | 200-250 | 5 |
|      | 676.416.180 | 16 | 3P+T   | 380-415 | 8 |
|      | 676.432.180 | 32 | 3P+T   | 380-415 | 5 |
|      | 676.516.180 | 16 | 3P+N+T | 380-415 | 8 |
|      | 676.532.180 | 32 | 3P+N+T | 380-415 | 5 |

### Kilitli Kapaklı Eğik Pano Prizler

/ Angled Panel Mounting Sockets with Locked Cover



| IP67 | Ref Code    | A  | P      | VOLT    |    |
|------|-------------|----|--------|---------|----|
|      | 676.316.190 | 16 | 2P+T   | 200-250 | 10 |
|      | 676.332.190 | 32 | 2P+T   | 200-250 | 5  |
|      | 676.416.190 | 16 | 3P+T   | 380-415 | 8  |
|      | 676.432.190 | 32 | 3P+T   | 380-415 | 5  |
|      | 676.516.190 | 16 | 3P+N+T | 380-415 | 8  |
|      | 676.532.190 | 32 | 3P+N+T | 380-415 | 5  |



6h

## Duvar Prizler / Wall Mounting Sockets

50-60 Hz.

**Dik Duvar Prizler**

/ Straight Wall Mounting Sockets



| IP44 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 446.316.410 | 16 | 2P+T   | 200-250 | 3 |
|      | 446.332.410 | 32 | 2P+T   | 200-250 | 2 |
|      | 446.416.410 | 16 | 3P+T   | 380-415 | 3 |
|      | 446.432.410 | 32 | 3P+T   | 380-415 | 2 |
|      | 446.516.410 | 16 | 3P+N+T | 380-415 | 3 |
|      | 446.532.410 | 32 | 3P+N+T | 380-415 | 2 |

**Kilitli Kapaklı Eğik Duvar Prizler**

/ Angled Wall Mounting Sockets with Locked Cover



| IP67 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 676.316.410 | 16 | 2P+T   | 200-250 | 3 |
|      | 676.332.410 | 32 | 2P+T   | 200-250 | 2 |
|      | 676.416.410 | 16 | 3P+T   | 380-415 | 3 |
|      | 676.432.410 | 32 | 3P+T   | 380-415 | 2 |
|      | 676.516.410 | 16 | 3P+N+T | 380-415 | 3 |
|      | 676.532.410 | 32 | 3P+N+T | 380-415 | 2 |

6h

Pano Prizler / Panel Mounting Sockets

50-60 Hz.

**Kapaklı Seyyar Prizler**  
/ Connectors with Cover



| IP44 | Ref Code    | A  | P      | VOLT    |    |
|------|-------------|----|--------|---------|----|
|      | 446.316.240 | 16 | 2P+T   | 200-250 | 10 |
|      | 446.332.240 | 32 | 2P+T   | 200-250 | 4  |
|      | 446.416.240 | 16 | 3P+T   | 380-415 | 10 |
|      | 446.432.240 | 32 | 3P+T   | 380-415 | 4  |
|      | 446.516.240 | 16 | 3P+N+T | 380-415 | 5  |
|      | 446.532.240 | 32 | 3P+N+T | 380-415 | 3  |

**Seyyar Fiş**  
/ Plugs



| IP44 | Ref Code    | A  | P      | VOLT    |    |
|------|-------------|----|--------|---------|----|
|      | 446.316.340 | 16 | 2P+T   | 200-250 | 10 |
|      | 446.332.340 | 32 | 2P+T   | 200-250 | 5  |
|      | 446.416.340 | 16 | 3P+T   | 380-415 | 10 |
|      | 446.432.340 | 32 | 3P+T   | 380-415 | 5  |
|      | 446.516.340 | 16 | 3P+N+T | 380-415 | 8  |
|      | 446.532.340 | 32 | 3P+N+T | 380-415 | 4  |

**Kilitli Kapaklı Seyyar Prizler**  
/ Connectors with Cover with Locked Cover



| IP67 | Ref Code    | A  | P      | VOLT    |    |
|------|-------------|----|--------|---------|----|
|      | 676.316.240 | 16 | 2P+T   | 200-250 | 10 |
|      | 676.332.240 | 32 | 2P+T   | 200-250 | 4  |
|      | 676.416.240 | 16 | 3P+T   | 380-415 | 8  |
|      | 676.432.240 | 32 | 3P+T   | 380-415 | 4  |
|      | 676.516.240 | 16 | 3P+N+T | 380-415 | 4  |
|      | 676.532.240 | 32 | 3P+N+T | 380-415 | 3  |

**Kilitli Seyyar Fiş**  
/ Plugs with Locked Cover



| IP67 | Ref Code    | A  | P      | VOLT    |    |
|------|-------------|----|--------|---------|----|
|      | 676.316.340 | 16 | 2P+T   | 200-250 | 10 |
|      | 676.332.340 | 32 | 2P+T   | 200-250 | 4  |
|      | 676.416.340 | 16 | 3P+T   | 380-415 | 8  |
|      | 676.432.340 | 32 | 3P+T   | 380-415 | 4  |
|      | 676.516.340 | 16 | 3P+N+T | 380-415 | 6  |
|      | 676.532.340 | 32 | 3P+N+T | 380-415 | 3  |

6h

İçten Kilitli Şalterli Prizler / Sockets with Internal Locked Switches

50-60 Hz.

**Yatay Pano Prizler**

/ Horizontal Panel Mounting Sockets



| IP44 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1444.316.15 | 16 | 2P+T   | 200-250 | 1 |
|      | 1444.332.15 | 32 | 2P+T   | 200-250 | 1 |
|      | 1444.416.15 | 16 | 3P+T   | 380-415 | 1 |
|      | 1444.432.15 | 32 | 3P+T   | 380-415 | 1 |
|      | 1444.516.15 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1444.532.15 | 32 | 3P+N+T | 380-415 | 1 |

**Yatay Kilitli Pano Prizler**

/ Horizontal Panel Mounting Sockets with Locked Cover



| IP67 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1467.316.15 | 16 | 2P+T   | 200-250 | 1 |
|      | 1467.332.15 | 32 | 2P+T   | 200-250 | 1 |
|      | 1467.416.15 | 16 | 3P+T   | 380-415 | 1 |
|      | 1467.432.15 | 32 | 3P+T   | 380-415 | 1 |
|      | 1467.516.15 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1467.532.15 | 32 | 3P+N+T | 380-415 | 1 |

**Yatay Duvar Prizler**

/ Horizontal Wall Mounting Sockets



| IP44 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1444.316.10 | 16 | 2P+T   | 200-250 | 1 |
|      | 1444.332.10 | 32 | 2P+T   | 200-250 | 1 |
|      | 1444.416.10 | 16 | 3P+T   | 380-415 | 1 |
|      | 1444.432.10 | 32 | 3P+T   | 380-415 | 1 |
|      | 1444.516.10 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1444.532.10 | 32 | 3P+N+T | 380-415 | 1 |

**Yatay Kilitli Duvar Prizler**

/ Horizontal Wall Mounting Sockets with Locked Cover



| IP67 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1467.316.10 | 16 | 2P+T   | 200-250 | 1 |
|      | 1467.332.10 | 32 | 2P+T   | 200-250 | 1 |
|      | 1467.416.10 | 16 | 3P+T   | 380-415 | 1 |
|      | 1467.432.10 | 32 | 3P+T   | 380-415 | 1 |
|      | 1467.516.10 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1467.532.10 | 32 | 3P+N+T | 380-415 | 1 |

6h

İçten Kilitli Şalterli Prizler / Sockets with Internal Locked Switches

50-60 Hz.

## Dikey Pano Prizler

/ Vertical Panel Mounting Sockets



| IP44 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1944.316.15 | 16 | 2P+T   | 200-250 | 1 |
|      | 1944.332.15 | 32 | 2P+T   | 200-250 | 1 |
|      | 1944.416.15 | 16 | 3P+T   | 380-415 | 1 |
|      | 1944.432.15 | 32 | 3P+T   | 380-415 | 1 |
|      | 1944.516.15 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1944.532.15 | 32 | 3P+N+T | 380-415 | 1 |

## Dikey Pano Prizler

/ Vertical Panel Mounting Sockets



| IP44 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1967.316.15 | 16 | 2P+T   | 200-250 | 1 |
|      | 1967.332.15 | 32 | 2P+T   | 200-250 | 1 |
|      | 1967.416.15 | 16 | 3P+T   | 380-415 | 1 |
|      | 1967.432.15 | 32 | 3P+T   | 380-415 | 1 |
|      | 1967.516.15 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1967.532.15 | 32 | 3P+N+T | 380-415 | 1 |

## Dikey Duvar Prizler

/ Vertical Wall Mounting Sockets



| IP67 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1944.316.10 | 16 | 2P+T   | 200-250 | 1 |
|      | 1944.332.10 | 32 | 2P+T   | 200-250 | 1 |
|      | 1944.416.10 | 16 | 3P+T   | 380-415 | 1 |
|      | 1944.432.10 | 32 | 3P+T   | 380-415 | 1 |
|      | 1944.516.10 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1944.532.10 | 32 | 3P+N+T | 380-415 | 1 |

## Dikey Duvar Prizler

/ Vertical Wall Mounting Sockets



| IP67 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1967.316.10 | 16 | 2P+T   | 200-250 | 1 |
|      | 1967.332.10 | 32 | 2P+T   | 200-250 | 1 |
|      | 1967.416.10 | 16 | 3P+T   | 380-415 | 1 |
|      | 1967.432.10 | 32 | 3P+T   | 380-415 | 1 |
|      | 1967.516.10 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1967.532.10 | 32 | 3P+N+T | 380-415 | 1 |

**6h İçten Kilitli Şalterli Prizler / Sockets with Internal Locked Switches & MCB 50-60 Hz.****Pano Prizler**  
/ Panel Mounting Sockets

| IP44 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1644.316.15 | 16 | 2P+T   | 200-250 | 1 |
|      | 1644.332.15 | 32 | 2P+T   | 200-250 | 1 |
|      | 1644.416.15 | 16 | 3P+T   | 380-415 | 1 |
|      | 1644.432.15 | 32 | 3P+T   | 380-415 | 1 |
|      | 1644.516.15 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1644.532.15 | 32 | 3P+N+T | 380-415 | 1 |

**Pano Kilitli Prizler**  
/ Panel Mounting Sockets  
with Locked Cover

| IP67 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1667.316.15 | 16 | 2P+T   | 200-250 | 1 |
|      | 1667.332.15 | 32 | 2P+T   | 200-250 | 1 |
|      | 1667.416.15 | 16 | 3P+T   | 380-415 | 1 |
|      | 1667.432.15 | 32 | 3P+T   | 380-415 | 1 |
|      | 1667.516.15 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1667.532.15 | 32 | 3P+N+T | 380-415 | 1 |

**Duvar Prizler**  
/ Wall Mounting Sockets

| IP44 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1644.316.10 | 16 | 2P+T   | 200-250 | 1 |
|      | 1644.332.10 | 32 | 2P+T   | 200-250 | 1 |
|      | 1644.416.10 | 16 | 3P+T   | 380-415 | 1 |
|      | 1644.432.10 | 32 | 3P+T   | 380-415 | 1 |
|      | 1644.516.10 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1644.532.10 | 32 | 3P+N+T | 380-415 | 1 |

**Duvar Kilitli Prizler**  
/ Wall Mounting Sockets  
with Locked Cover

| IP67 | Ref Code    | A  | P      | VOLT    |   |
|------|-------------|----|--------|---------|---|
|      | 1667.316.10 | 16 | 2P+T   | 200-250 | 1 |
|      | 1667.332.10 | 32 | 2P+T   | 200-250 | 1 |
|      | 1667.416.10 | 16 | 3P+T   | 380-415 | 1 |
|      | 1667.432.10 | 32 | 3P+T   | 380-415 | 1 |
|      | 1667.516.10 | 16 | 3P+N+T | 380-415 | 1 |
|      | 1667.532.10 | 32 | 3P+N+T | 380-415 | 1 |